

YOUR A200: CONFIGURED TO YOUR PREFERENCES

1 A200 OPTIONS

- Bean hopper: 2x0.6 kg, lockable
- Permanent water supply connection
- Coffee grounds ejector
- Raised feet (40 / 100 mm)

2 MILK SYSTEM

- FoamMaster™ (FM): hot and cold milk and milk foam, individually adjustable consistency, integrated cleaning system
- Milk system (MS): hot milk and milk foam (KE200)

3 CLEANING SYSTEM

- CleanMaster (CM): fully automatic cleaning system with integrated cleaning cartridge. For outstanding hygiene and unbeatable simplicity, efficiency, and convenience.
- EasyClean (EC): automatic cleaning system with manual addition of the cleaning fluid. Perfect hygiene in just a few steps.

4 ACCOUNTING SYSTEM

Can be used for various payment methods, e.g. with coins, card. Ideally suited to public/private vending applications.

5 CUP WARMER

With four heatable trays.



FLEXIBILITY

Our product portfolio allows various assembly options – tailored to your needs.



FRANKE


MAKE IT WONDERFUL

Franke Kaffeemaschinen AG
cs-info.ch@franke.com

Franke Coffee Systems GmbH
cs-info.de@franke.com

Franke Coffee Systems Americas
cs-coffeesales.us@franke.com

Franke Coffee Systems UK
sales@Frankecoffeesystems.co.uk



coffee.franke.com

590.0598.274/03.20/CH-EN/Subject to dimensional, design and version changes.

A200

With the compact A200, making premium coffee has never been so simple – making it all about the moment for the customer. The easy-to-use screen allows you to choose from up to 36 drink combinations, while the optional FoamMaster™ lets you create the perfect foam for every desire. Additional features such as an integrated cleaning system and ceramic grinders mean you have a machine that you can always rely on to produce the perfect coffee. Time and time again.

CAPACITY*	SINGLE	PARALLEL
Espresso	102	148
Cappuccino	94	158
Coffee	69	85
Hot water	99	

*Cups per hour according to DIN 18873



CLEANMASTER
Fully automatic
cleaning process



TOUCH SCREEN
Easy-to-use even
for new users



GRINDERS
Two ceramic grinders
for more flexibility


FRANKE

MAKE IT WONDERFUL

TECHNICAL DATA


MACHINE MODELS

Model	Power	
A200 MS EC	220-240V 1LNPE 50/60Hz 2.4-2.75kW (13/15/16*A)	
	220-240V 1LNPE 50/60Hz 1.2-1.5 kW (10A)	
	220V 1LNPE 50Hz 2.4kW (16A)	
	100V 2LPE 50/60Hz 1.3kW (15A)	
	120V 2LPE 60 Hz 1.45 kW (15A)	
Dimensions	340 mm / 600 mm / 560 mm (W / H / D)	
Weight (empty)	approx. 25 kg	
A200 FM CM	220-240V 1LNPE 50/60Hz 2.4-2.75kW (13/15/16*A)	
	220-240V 1LNPE 50/60Hz 1.2-1.5 kW (10A)	
	220V 1LNPE 50Hz 2.4kW (16A)	
	100V 2LPE 50/60Hz 1.3kW (15A)	
	120V 2LPE 60 Hz 1.45 kW (15A)	
Dimensions	340 mm / 613 mm / 560 mm (W / H / D) (FM CM inkl. SU05 FM CM)	
Weight (empty)	approx. 45 kg (FM CM inkl. SU05 FM CM)	
Colors	Black or anthracite	
SU05 CM	220-240 VAC, 1L N PE, 1950-2300 W, 50-60 Hz, 10 Á (EU)	
	120 VAC, 1L PE, 1400 W, 60 Hz, 15 Á (USA)	
	Dimensions	340 mm / 613 mm / 560 mm (W / H / D) (FM CM inkl. SU05 FM CM)
	Weight (empty)	approx. 45 kg (FM CM inkl. SU05 FM CM)
	Colors	Black or anthracite

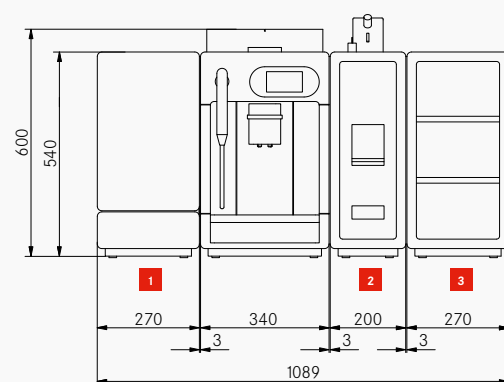

WATER CONNECTION

Fixed water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80-800 kPa (0.8-8.0 bar)
Flowrate	>0.1l/sec
Water temperature	<25°C
Total hardness	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
Carbonate hardness	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content/pH value	6.5-7.5 pH
Chlorine content	<0.5 mg/l
Internal Water Tank	4,0 liter, level monitoring with filter cartridge Claris Drip tray 2,4 liter, level monitoring

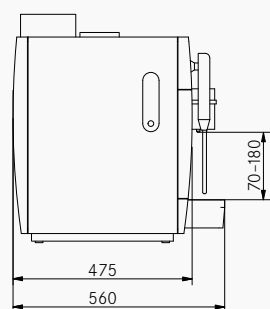


WATER DRAIN


Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------

ADD-ON UNITS

1 REFRIGERATION UNIT	SU05 CM (5l)
Electrical connection	220-240 V 1LNPE 50/60Hz 1.95-2.3kW (10A) 120V 1LNPE 60 Hz 1.44 kW (15 A) 220 V 1LNPE 50 Hz 0.72 A (10 A) 100V 1LNPE 50/60Hz 1.35 kW (15 A)
Dimensions	270 mm / 540 mm / 475 mm (W / H / D)
Weight (empty)	approx. 24 kg
Compatible with	Model A200 FM CM
Colors	Black or anthracite

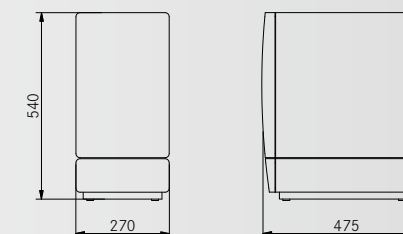


2 ACCOUNTING SYSTEM	AC 200
Accounting systems	Coin validator, Coin changer, Cashless system
Electrical connection	85-264 V 1LNPE 50/60 Hz (10 A)
Dimensions	200 mm / 630 mm / 453 mm (W / H / D)
Weight (empty)	approx. 18 kg
Compatible with	Model A200 MS EC / A200 FM CM
Colors	Black or anthracite

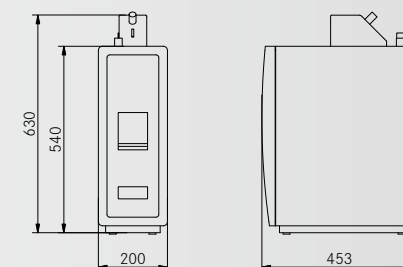

ACCOUNTING SYSTEM	AC125CL
Electrical connection	85-264V 1LNPE 50/60 Hz (10A)
Dimensions	125 mm / 150 mm / 310 mm (W / H / D)
Weight (empty)	approx. 2 kg
Compatible with	Model A200 MS EC / A200 FM CM
Colors	Black



3 CUP WARMER	CW
Electrical connection	220-240 VAC, 1L N PE, 110-130W, 50-60 Hz 110-127 VAC, 1L N PE, 80-130W, 50-60 Hz 100 VAC, 1L N PE, 80W, 50-60 Hz 220 VAC, 1L N PE, 110W, 50-60 Hz
Dimensions	270 mm / 540 mm / 454 mm (W / H / D)
Weight (empty)	approx. 20 kg
Compatible with	Model A200 MS EC / A200 FM CM
Colors	Black or anthracite

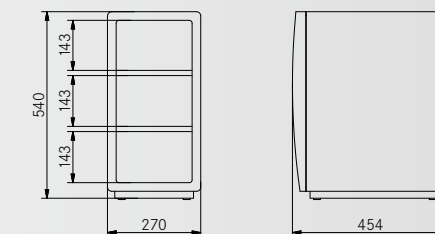

REFRIGERATION UNIT	KE200 (4l)
Electrical connection	220-240 VAC, 1L N PE, 82 W, 10 Á, 50-60 Hz 110 VAC, 1L N PE, - W, 1,5 Á, 60 Hz 100 VAC, 1L N PE, - W, 1,5 Á, 50-60 Hz
Dimensions	225 mm / 356 mm / 453 mm (W / H / D)
Weight (empty)	approx. 13 kg
Compatible with	Model A200 MS EC

